



Advantages

- ✓ Short cut-off at 180nm
- ✓ Large Angle Tolerance
- ✓ Small Walk-off Angle
- ✓ No Saturation for High-Power Generation

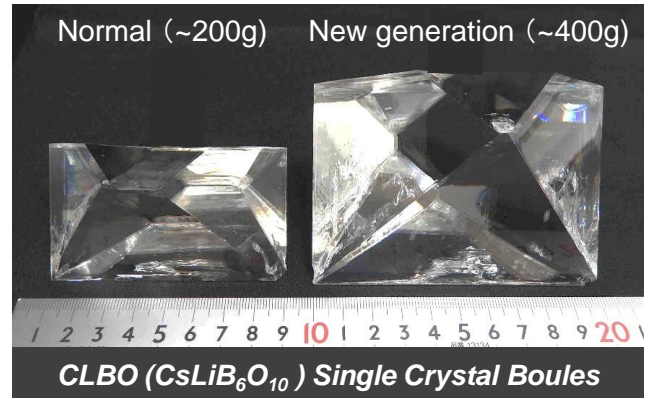

Typical Specifications

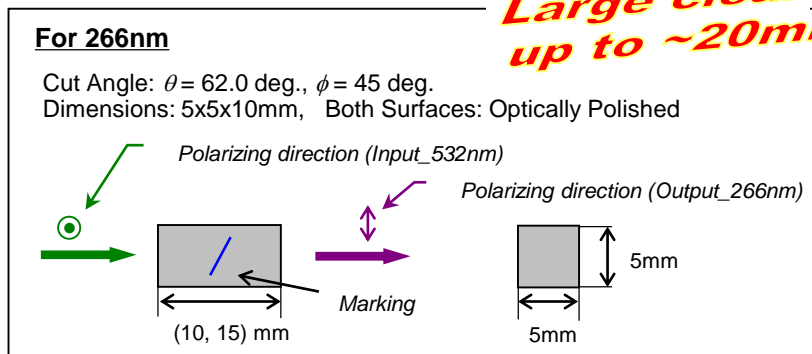


Large clear aperture up to ~20mm available now!



*Cut angle and dimensions are selectable.

Application

- ✓ **Machining**
- ✓ **Micro Processing**
- ✓ **Semiconductor Inspection**
- ✓ **Bio-Medical**
- ✓ **UV-LIDAR**

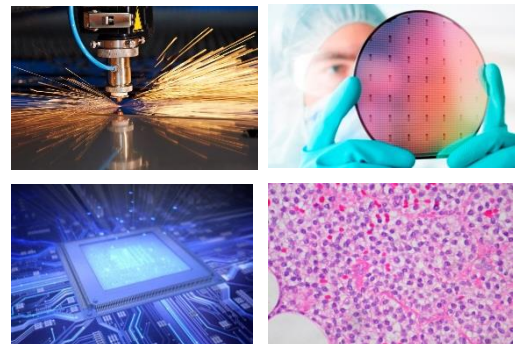

The sole official licensee

Comprehensive set of licensed patents, including material, its application and use

CLBO crystal : JPN #2812427,#2744604 USA #6296784, #5998313 EU #693581, #786542

Application : JPN #4911494 USA #794863 CHN #ZL200780006027.X TWN #I408482

OXIDE

Oxide Corporation



1747-1 Makihara, Mukawa, Hokuto, Yamanashi 408-0302 JAPAN

Tel: +81-551-26-0022, Fax: +81-551-26-0033


Sales@opt-oxide.com, <https://www.opt-oxide.com>

Properties & Sellmeier's Equations


Wavelength (nm)	NLO Crystal	Phase Matching Angle (deg)	d _{eff} (pm/V)	Angle Tolerance (mrad.cm)	Walk-off Angle (deg)
1064+532 = 355	CLBO	48.9	0.71	0.92	2.11
	BBO	34.6	2.01	0.24	4.47
532+532 = 266	CLBO	62.0	0.79	0.55	1.84
	BBO	47.7	1.75	0.19	4.89
1064+266 = 213	CLBO	68.3	0.95	0.48	1.66
	BBO	51.1	1.95	0.13	5.51

Remark: PMT = 150 degree-C @CLBO, 27 degree-C @BBO


Damage Threshold

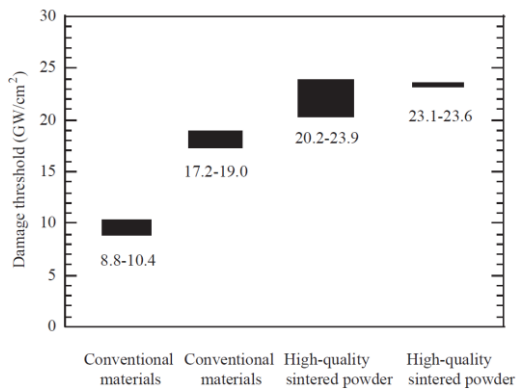

High Power Generation

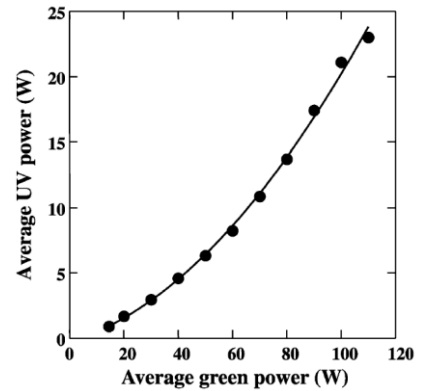

Transmission

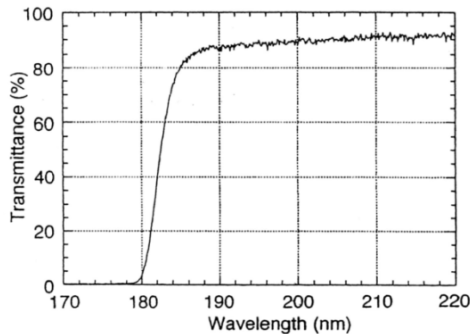

Sellmeier equations

$$n_o^2 = 2.2145 + \frac{0.00890}{\lambda^2 - 0.02051} - 0.01413\lambda^2$$

$$n_e^2 = 2.0588 + \frac{0.00866}{\lambda^2 - 0.01202} - 0.00607\lambda^2$$

(20 degree-C, λ in μm)

References

- M.Nishioka, A.Kanoh, M.Yoshimura, Y.Mori, and T.Sasaki,
 "Growth of CLBO crystals with high laser-damage tolerance",
 Journal of Crystal Growth 279 (2005) 76-81
- T.Sasaki, Y.Mori, M.Yoshimura,
 "Progress in the growth of a CsLiB₆O₁₀ crystal and its application to ultraviolet light generation",
 Optical Materials, 23 (2003) 343-351
- N.Umemura and K.Kato,
 "Ultraviolet generation tunable to 0.185 μm in CsLiB₆O₁₀",
 Applied Optics, 36 (1997) 6794-6796

OXIDE

Oxide Corporation

1747-1 Makihara, Mukawa, Hokuto, Yamanashi 408-0302 JAPAN

Tel: +81-551-26-0022, Fax: +81-551-26-0033

Sales@opt-oxide.com, <https://www.opt-oxide.com>

Contents are things of 23-Jun-2017