

NEW

Fiber Out CW 532nm Laser

High performance Laser with a robust fiber delivery

Preliminary



CW 5W

No Heat Sink


Feature

- ✓ CW 5W, MMF
- ✓ Compact, Robust Head
- ✓ Easily Integrated with Cameras and Systems

Application

- ✓ Particle Image Velocimetry (PIV)
- ✓ Particle Size Measurement
- ✓ High Speed Imaging

Cooling Less Technology

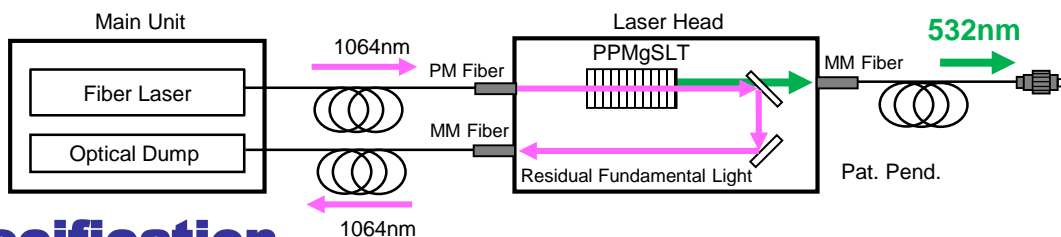

Specification

Wavelength	532nm
Output Fiber	Multimode fiber (FG105UCA ϕ 100um core diameter)
	Fiber length: 5 +/- 0.3m (ϕ 5mm steel use stainless pipe)
	FC(APC)—FC(PC)
Center Wavelength	532 +/- 0.1nm
Optical Output	\geq 5W
Laser Head Dimensions (L x W x H)	100(W) x 45(H) x 160(L)mm < Heat Sink Not required >

Option

- ✓ Dual Output 1064nm , 532nm

OEM with Low Cost (DC input version) AVAILABLE

OXIDE

Oxide Corporation

1747-1 Makihara, Mukawa, Hokuto, Yamanashi 408-0302 JAPAN

Tel: +81-551-26-0022, Fax: +81-551-26-0033

Sales@opt-oxide.com, <http://www.opt-oxide.com>

Contents are things of 1-Feb-2013.